

## SPECIFICATION

PART NO. : DT20  
产品型号

SPEC NO. : 6FTW200004  
规格书编号




DESCRIPTION. : 20 Amp Decorative TR(带安全门) Outlet  
产品描述

DATE. : 2021-03-15  
日期

### R&D Department 技术部

APPROVED (核准)	CHECKED (审核)	PREPARED (制订)
刘渠永	李再建	陶喜权

版本	标记	更改单号	更改描述	签名	日期
A		-----	新版本	李再建	2021.03.15

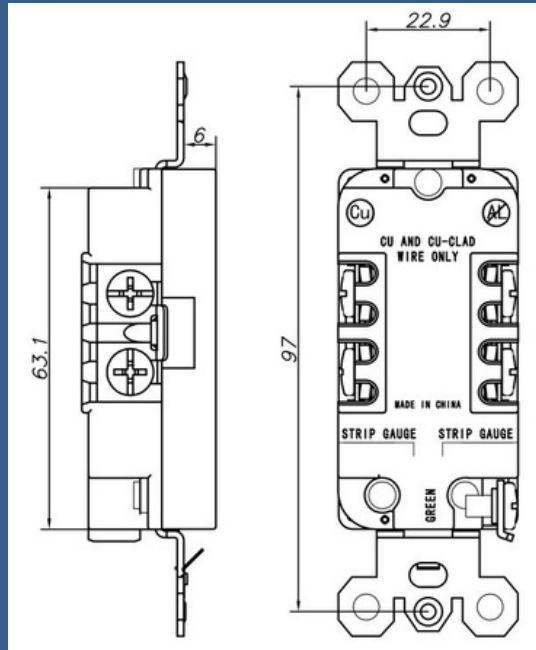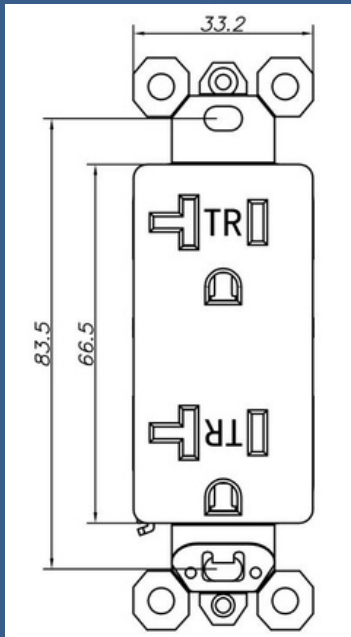

**SPEC 规格参数:**

- 1.Voltage Range: 102~132V  
电压范围
- 2.Working Voltage: 125V AC  
工作电压
- 3.Rated Current: 20Amp  
额定电流
- 4.Grounding: Self-Grounding With Extend Cooper Clip  
带自接地铜片
- 5.Tightening Torque: 1.6N·M  
接线螺丝扭矩
- 6.Insertion 插入力: <178N  
Pull Out force 拔出力: ≤ 67N  
Plug Retention 保持力: 13.3N1Min (Static Condition)
- 7.Working Temperature Range: -35°C~ 70 °C  
工作温度
- 8.The unmarked dimensional tolerance shall be in accordance with GB / T1804-2000-m.  
未注尺寸公差均按 GB/T1804-2000-m.
9. Withstand voltage: 2000vac / min  
耐压等级

设计	陶喜权			产品型号: DT20
审核	李再建	图	A4	产品名称: 接线插座
标准化		面	mm	产品图号: 6FTW200004
批准	刘渠永	单	A	温州方特电气有限公司

Decorative Receptacles Wiring Devices  
Item No.: DT20

### Specification

Certification:	UL / cUL
File No.:	E498095
Grade:	Residential & Commercial
Feature:	Decorative Outlet
Standard Version:	UL498 16th Edition/CSA C22.2 NO. 42-10
Wiring:	Back Wire & Side Wire
Rating:	20A 125V AC
NEMA:	5-20R
Pole & Wire:	2-Pole, 3 Wire
Spec:	Tamper-Resistant
Grounding:	Self-Grounding with Extend Cooper Clip
Dielectric Voltage Withstand :	1250V

### Material Characteristics

Front Cover/Body:	High-Impact PC-Thermoplastic
Operation Temperature:	-35 °C ~ 70 °C
Environmental :	Flammability UL-94 V2 Rating
Yoke:	Zinc-Plated Steel 1.2mm Thick
Clamps:	Phosphor Bronze 0.8mm Thick
Terminal Screws:	Plated Steel
Warranty:	2 Years Limited