

Fittings for Rigid Conduit and IMC

Rigid Couplings

Material : Steel


Finish : Electro-Galvanized



UL LISTED:E475645

CAT #	SIZE	O.D.	Height (H)	Thickness	Qty/Box
			(mm)		
0324H	1/2"	26.0	40.0	3.0	300
0325H	3/4"	32.0	42.0	3.5	200
0326H	1"	39.0	50.0	4.0	120
0327H	1-1/4"	48.0	52.0	4.0	80
0328H	1-1/2"	55.0	52.0	4.7	80
0329H	2"	68.0	60.0	5.0	60
0330H	2-1/2"	83.0	80.0	6.0	15
0331H	3"	98.0	85.0	5.5	12
0333H	4"	124.0	90.0	6.0	12
0335H	6"	180.0	108.0	7.0	4

★ Consult Manufacturer for Proper Installation

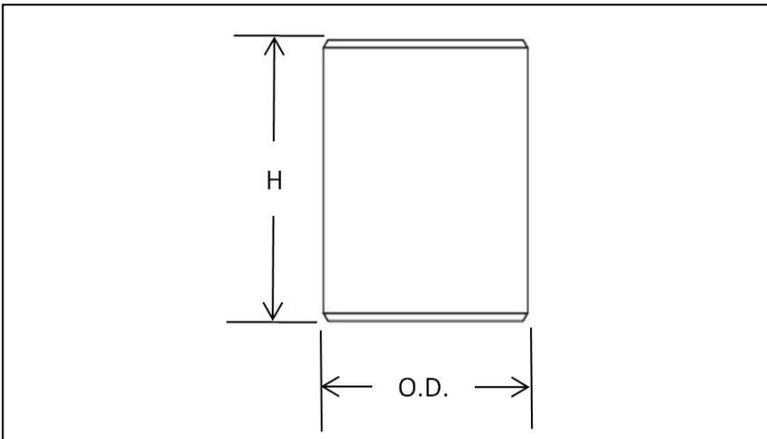

- Features:**
- NPSM thread type Applications.
 - Use to join and ensure proper alignment of threaded Rigid or IMC conduit.